


19" LED Specifications



Key Features

- Sunlight Readable
- LED Backlight
- High Shock & Vibration Resistance
- Low Power Consumption
- Low EMI Noise
- Wide Dimming
- Multiple Mounting Choices
- Life Expectancy (70,000hrs)

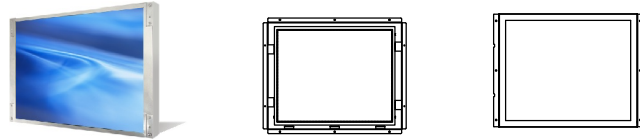

DLF/DLH/SLO/SLD1954

Model No.	DLF1954	DLH1954	SLO1954	SLD1954
LCD Display	19" LED Backlight LCD			
Display Area	376.32 x 301.06mm			
Brightness	1000 cd/m ²			
Resolution	1280x1024 (SXGA)			
Contrast Ratio	800 : 1			
Pixel Pitch (mm)	0.294(H) x 0.294(V)			
Viewing Angle	+80°~-80°(H), +80°~-80°(V)			
Display Color	16.7M			
Response Time	5ms (Typical)			
Sync	LVDS			
Power Consumption	31W	37W	37W	37W
LED Driving Board	LI D19A01			
Control Board (Optional)		<input checked="" type="checkbox"/> AD5621GA <input checked="" type="checkbox"/> AD5621GD <input checked="" type="checkbox"/> AD5766GDVA	<input checked="" type="checkbox"/> AD5621GA <input checked="" type="checkbox"/> AD5621GD <input checked="" type="checkbox"/> AD5766GDVA	<input checked="" type="checkbox"/> AD5621GA <input checked="" type="checkbox"/> AD5621GD <input checked="" type="checkbox"/> AD5766GDVA
F / R Control Button		<input checked="" type="checkbox"/> 5 Key <input checked="" type="checkbox"/> 4 Key		
OSD Menu		Brightness, Contrast, H/V Position, Color, Phase, Clock....		
Dimensions (WxHxD)mm	396x324x16.8	396x324x16.8	470x380x55.1	451x343x58
Weight	2.14kg	2.26kg	5.11kg	5.35kg
Optional	<input checked="" type="checkbox"/> AOT <input checked="" type="checkbox"/> Touch <input checked="" type="checkbox"/> Waterproof			

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA
<input checked="" type="checkbox"/> AD5621GA	VGA+Audio
<input checked="" type="checkbox"/> AD5621GD	VGA+DVI
<input checked="" type="checkbox"/> AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
F / R Control Button	5 Key / 4 Key (Optional)
<input checked="" type="checkbox"/> 5 Key	Power Switch, Menu, Select (+, -), Auto
<input checked="" type="checkbox"/> 4 Key	Power Switch, Menu, Select (+, -)

