


42" CCFL Specifications



Key Features

- Sunlight Readable
- 16:9 Wide
- Wide Viewing Angle
- High Contrast Ratio
- LVDS
- Long Lamp Life
- Fast Response Time
- 20 CCFL

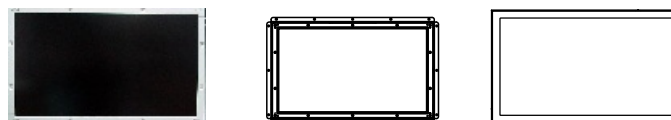

ALF/ALH/SLO/SLD4212/15

Model No.	ALF4212/15	ALH4212/15	SLO4212/15	SLD4212/15
LCD Display	42" WXGA TFT LCD Module			
Display Area	930.25 x 530.01mm			
Brightness	500 cd/m ² / 1000 cd/m ²			
Resolution	1366x768 (WXGA)			
Contrast Ratio	1500 : 1/1000:1			
Pixel Pitch (mm)	0.681(H) x 0.681(V)			
Viewing Angle	+89°~-89°(H), +89°~-89°(V)			
Display Colors	16.7M colors			
Response Time	8ms (Typical)			
Sync	LVDS			
Power Consumption	183W/ 240W	193W/ 245W	193W/ 245W	193W/ 245W
Inverter	LIPS4201			
Control Board (Optional)		<input checked="" type="checkbox"/> AD5621GA <input checked="" type="checkbox"/> AD5621GD <input checked="" type="checkbox"/> AD5766GDVA	<input checked="" type="checkbox"/> AD5621GA <input checked="" type="checkbox"/> AD5621GD <input checked="" type="checkbox"/> AD5766GDVA	<input checked="" type="checkbox"/> AD5621GA <input checked="" type="checkbox"/> AD5621GD <input checked="" type="checkbox"/> AD5766GDVA
F / R Control Button		<input checked="" type="checkbox"/> 4 Key		
OSD Menu		Brightness, Contrast, H/V Position, Color, Phase, Clock....		
Dimensions (WxHxD)mm	967x558.6x64.9	967x558.6x64.9	1007x558.6x86.6	967x558.6x86.6
Weight	12.6kg/13.5kg	13kg/13.9kg	TBA	TBA
Optional	<input checked="" type="checkbox"/> AOT <input checked="" type="checkbox"/> Touch			

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA	
<input checked="" type="checkbox"/> AD5621GA	VGA+Audio	
<input checked="" type="checkbox"/> AD5621GD	VGA+DVI	
<input checked="" type="checkbox"/> AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)	
F / R Control Button		
<input checked="" type="checkbox"/> 4 Key	Power Switch, Menu, Select (+, -)	

